

NOTES:

1. LARGE WOODY DEBRIS (LWD'S) ARE NOT ANCHORED IN ORDER TO MINIMIZE CATASTROPHIC FAILURE, REDUCE SEDIMENTATION, AND ALLOW MATERIAL TO REACH AN EQUILIBRIUM STATE BASED ON CHANGING CREEK CONDITIONS.
2. LWD'S PLACED PARALLEL TO CREEK BANK PROVIDES OVERHANGING COVER.
3. LWD'S ANGLED UPSTREAM AND PERPENDICULAR PROVIDE SCOUR POOLS, COVER AND DEFLECTION OF CURRENT.
4. LWD'S ANGLED DOWNSTREAM PROVIDE HIGH FLOW, JUVENILE REFUGE AND ADULT HOLDING.
5. PLACEMENT OF DEBRIS SHOULD APPEAR RANDOM AND NATURAL.
6. SMALL WOODY DEBRIS CAN ALSO BE PLACED IN DENDRITES TO PROVIDE TEMPORARY HABITAT.

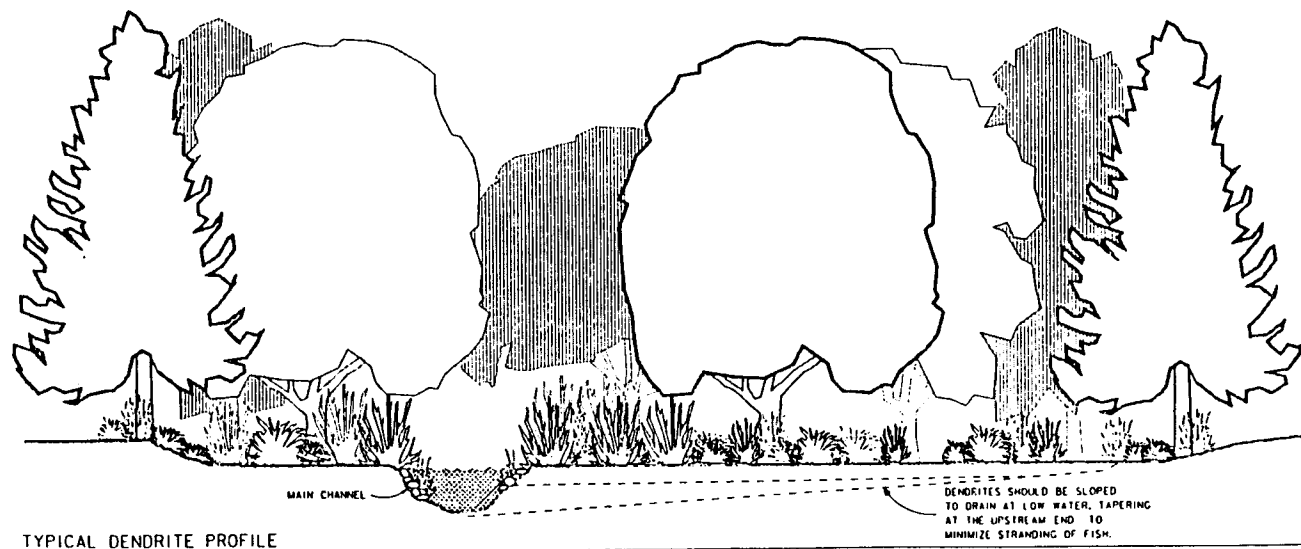


Figure 3-8
Dendrite Illustration